


## RAM SLOTTED TRACK

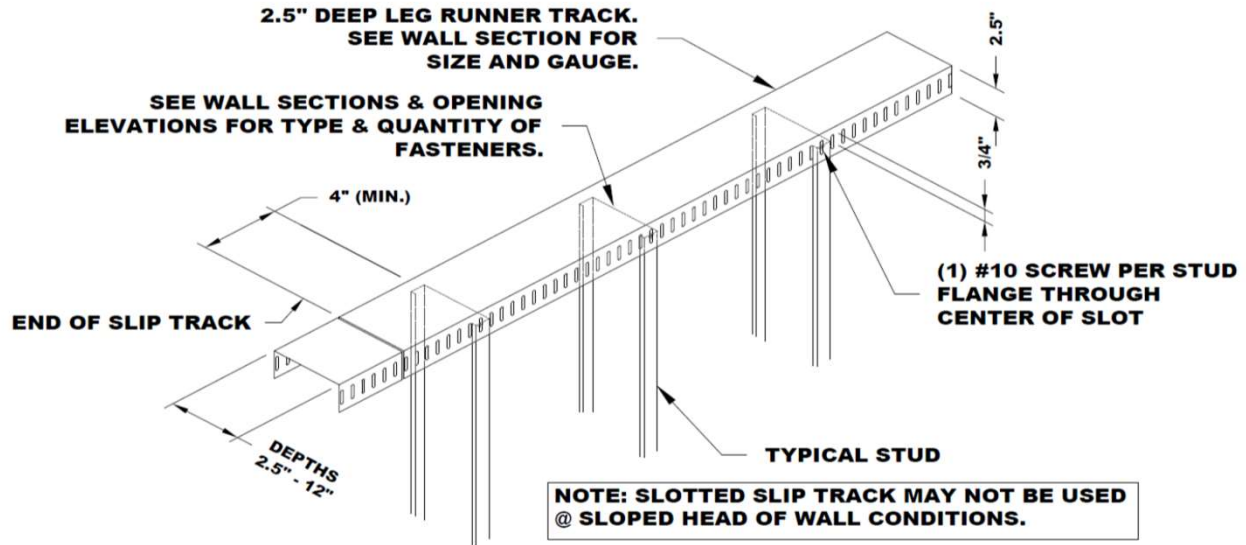

### Material Properties:

Material Thickness (mil)	Yield Strength (ksi)	Color Code	Standard Coatings	Design Thickness (in.)	Minimum Thickness (in.)
24	33	Brown	G40 <sup>1</sup>	0.0250 (.64mm)	0.0238 (.60mm)
30	33	Pink	G40 <sup>1</sup>	0.0312 (.79mm)	0.0296 (.75mm)
33	33	White	CP60, CP90 <sup>2</sup>	0.0346 (.88mm)	0.0329 (.84mm)
43	33	Yellow	CP60, CP90 <sup>2</sup>	0.0451 (1.15mm)	0.0428 (1.09mm)
54	50	Green	CP60, CP90 <sup>2</sup>	0.0566 (1.44mm)	0.0538 (1.37mm)
68	50	Orange	CP60, CP90 <sup>2</sup>	0.0713 (1.81mm)	0.0677 (1.72mm)

### Product Dimensions:

Web Depth (in.)	Flange / Leg (in.)	Slot Length (in.)	Standard Thicknesses (mils)	Stock Lengths (ft.)
2.50	2.5	1.5	24, 30, 33, 43, 54	10' (Avail 4' - 20')
3.50	2.5	1.5	24, 30, 33, 43, 54	10' (Avail 4' - 20')
3.63	2.5	1.5	24, 30, 33, 43, 54, 68	10' (Avail 4' - 20')
4.00	2.5	1.5	24, 30, 33, 43, 54, 68	10' (Avail 4' - 20')
5.50	2.5	1.5	24, 30, 33, 43, 54, 68	10' (Avail 4' - 20')
6.00	2.5	1.5	24, 30, 33, 43, 54, 68	10' (Avail 4' - 20')
7.25	2.5	1.5	33, 43, 54, 68	10' (Avail 4' - 20')
8.00	2.5	1.5	43, 54, 68	10' (Avail 4' - 20')
9.25	2.5	1.5	43, 54, 68	10' (Avail 4' - 20')
10.00	2.5	1.5	43, 54, 68	10' (Avail 4' - 20')
11.25	2.5	1.5	43, 54, 68	10' (Avail 4' - 20')
12.00	2.5	1.5	43, 54, 68	10' (Avail 4' - 20')

### Codes & Standards

- 2017 Florida Building Code, 2018 International Building Code (and prior editions of each)
- Nonstructural AISI S220 & ASTM C645, Structural AISI S400, S100 & ASTM C955
- Materials: A1003, A653 & A924

### Miami

7400 NW 37 Ave  
Miami, FL 33147  
(305) 634-0012

### Orlando

1150 Albright Rd  
Orlando, FL 32771  
(407) 915-4776

### Technical Services

1-844-4-0-STUDS  
support@ramsteel framing.com